

Industrial & Electrical Fog

Our industrial fog nozzles were created to handle the rigors of industrial needs in refineries, chemical plants, office complexes and other on-site situations. Several different materials are available to suit every need, and most nozzles are U.L. listed and/or FM approved.


The fog nozzles with the electrical specification in the chart are designed to be used

on class "C" hazards and utilize only fog capabilities in combating blazes at 10' or more from live electrical equipment and/or circuits with voltage up to 250,000. All other industrial fog nozzles can be used in either straight stream or fog combinations.

Base Size	AVAILABLE STANDARD FLOW RATES GPM (LPM)								FLOW TYPE		SHUT-OFF		CERT.	BASE			MATERIAL / FINISH			DIMENSIONS		MODEL	FIGURE		
	12 (45)	23 (87)	60 (227)	75 (284)	95 (360)	125 (473)	170 (644)	250 (946)	Fixed Flow	Variable Flow	Twist	Ball		Electrical	FM Approved	U.L. Listed	Rigid	Swivel	Free Swivel	Brass				Length (Inches)	Weight (Lbs.)
	PSI (BAR) 100 (6.89)																			Satin	Chrome				
1.5"					•	•			•		•			•	s			s	o		5.00	2.875	L-205-B	2	
		•			•	•			•		•				s			s	o		4.75	4.125	L-200	1	
			•						•		•				s					s	4.875	0.375	1575	3	
							•		•		•			•	s			s	o		7.063	5.625	205-B	4	
					•	•			•		•			•	s			s	o		5.00	2.875	L-205-EB*	2	
			•						•		•			•	s			s	o		3.00	1.50	L-206-T		
			•						•		•			•	s					s	4.875	0.375	1575-E	3	
2.5"							•	•	•	•	•		•	s			s	o		7.063	5.625	205-EB	2		
							•	•	•	•	•		•	s			s	o		8.313	7.375	D-205-B	4		
							•	•	•	•	•		•	s			s	o		11.563	8.75	D-200	1		
							•	•	•	•	•		•	s			s	o		8.313	7.375	D-205-EB	4		

Key: s = standard o = option
*NOTE: 125 GPM Nozzle NOT UL Listed

FOG NOZZLE CONFIGURATIONS

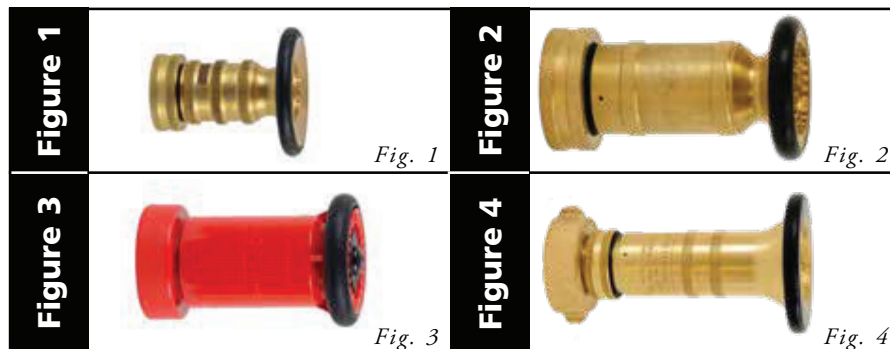

OPTIONS
THREADS
<i>All nozzles are NHT unless otherwise specified. See index T-13 for optional base threads, including British instantaneous.</i>

Figures depict general product types only and are not intended to be inclusive of all product features.